




imants[®] ShockWave[™]

The **Imants ShockWave** is a linear decompactor designed to both maintain proper soil porosity and bulk density during the growing season and revitalize heavy wear areas by relieving soil compaction, improving aeration, and removing surface water. At a working depth of 4 1/2" to 10" or 15" depending on the model, the **ShockWave** provides maximum surface decompaction with minimal surface disruption. The **ShockWave** is reputed to be the world's fastest PTO driven rotary, linear decompactor. All **ShockWave** models feature a no-chains, direct drive design, and maintenance free "sealed for life" bearings. The **ShockWave** features overload protection by a torque limiting PTO shaft.

HIGHLIGHTS

- Reduces bulk density
- Increases soil's ability to move water
- Increases aeration

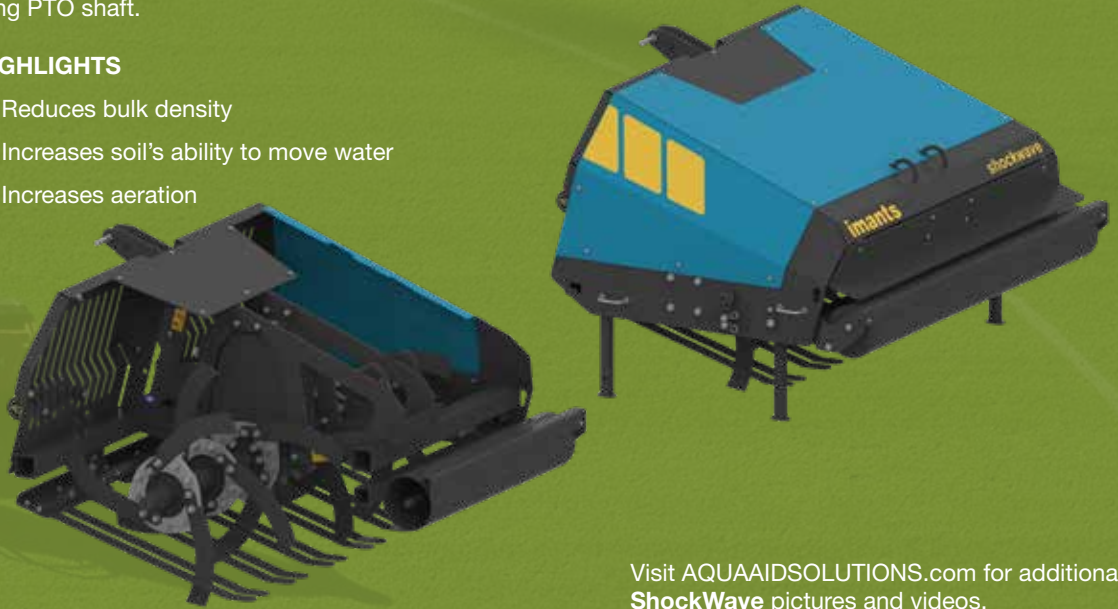

Visit AQUAAIDSOLUTIONS.com for additional **ShockWave** pictures and videos.

Specifications

	Model 1.0	Model 1.6	Model 2.1
Working Width	39"	63"	83"
Transport Width	69"	69"	90"
Working Depth	4 3/8" - 10"	4 3/8" - 10"	4 3/8" - 10"
Weight (approx)	1,157 lb	1,400 lb	1,653 lb
Weight with Pre-cutters	1,294 lb	1,581 lb	1,884 lb
Blade Spacing	10"	10"	10"
Blade Thickness	5/32" or 1/2"	5/32" or 1/2"	5/32" or 1/2"
Number of Blades	12	18	24
Power Requirement	40 - 55 hp	40 - 55 hp	50 - 65 hp
Coulters	4	6	8
Weight of Coulters Option	97 lb	110 lb	134 lb

Tractor Requirement: 540 pto, Creep gear or hydrostatic drive required, 4-wheel drive recommended. Confirm individual tractor specification has adequate lifting capacity.

Operating Speed: 0.3 to 0.9 mph