




Super Compact™

The **Vredo Super Compact** series is an accurate and efficient range of disc seeders designed for inter-seeding into prepared seedbeds or existing stands of turf. At an approximate spacing of 1 1/2", seed is placed in a V-shaped slit, at a controllable depth of 3/16" to 1" deep, directly in contact with the soil for maximum germination rate. The slits are then closed by a roller and a level surface is re-established. The **Vredo Super Compact** series includes precision calibration and a ground driven system allowing inter-seeding to be completed at speeds between 1 and 12 mph. Seed will be accurately sown at a set rate independent of ground speed. There are two different widths available to suit tractor overlap. Each width model can be 3-point mounted or converted to towed-mount by the addition of an optional tow kit.



HIGHLIGHTS

- Industry leading germination rate
- Minimal surface disruption – no clean up needed
- Proper seed to soil contact to maximize germination
- Each disc is independently suspended allowing continuous disc to soil penetration over undulating ground

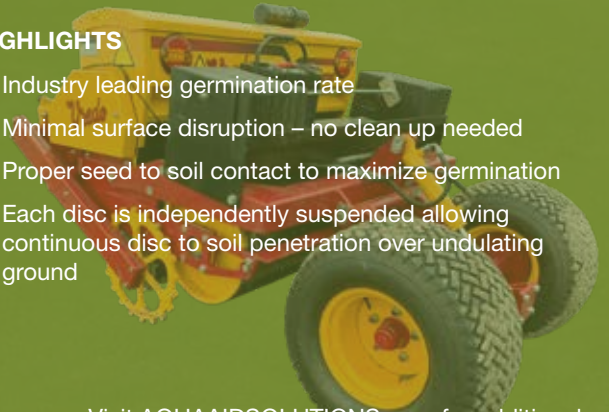

Visit AQUAAIDSOLUTIONS.com for additional **Vredo Super Compact** pictures and videos.

Specifications

	DZ 212.035	DZ 212.035T	DZ 216.035	DZ 216.035T	DZ 218.035	DZ 218.035T
Working Width	48"		62"		70"	
Transport Width	56"		72"		80"	
Max. Recommended Weights	12 (44 lb per wgt)		16 (44 lb per wgt)		18 (44 lb per wgt)	
Weight w/ Weight Kit (approx)	2,167 lb	2,615 lb	2,597 lb	3,058 lb	2,884 lb	3,307 lb
Sowing Depth	3/16" - 1"					
Row Spacing	1 3/8"					
Disc Diameter	10"					
No. of Disc Sets	35		45		51	
Seed Hopper Volume	4.2 cu. ft.		5.6 cu. ft.		6.3 cu. ft.	
Compaction Roller Volume	32 gal (267 lb)		42 gal (350 lb)		47 gal (392 lb)	
Power Requirement	40 - 60 hp ◊	25 - 50 hp ◊	50 - 70 hp ◊	40 - 65 hp ◊	70 - 90 hp ◊	50 - 75 hp ◊

Tractor Requirement: ◊ Refer to individual tractor specifications for lifting capacity